


GB/T 9119 PN2.5 PL 平板法兰属于国标[法兰标准](#)体系。是国标法兰(又称 GB 法兰)的其中一种表现形式,是设备或管道上常用的法兰。以下是 GB/T 9119 PN2.5 PL 平板法兰中,相关压力下,各部位的全部尺寸及图示,以方便广大法兰从业者查询和参考。

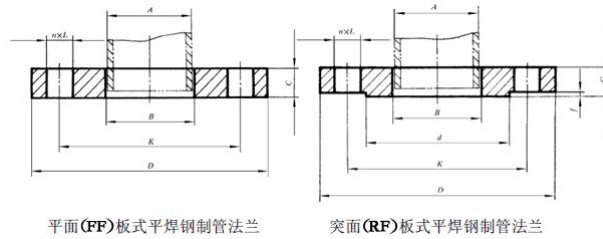

平面(F_F)板式平焊钢制管法兰

突面(R_F)板式平焊钢制管法兰

PN2.5 MPa (25 bar) 平面、突面板式平焊钢制管法兰 mm

公称 口径 DN	钢管外径 A		连接尺寸				密封面		法兰 厚度 C	法兰内径 B													
	系列 I	系列 II	法兰 外径 D	螺栓孔 中心圆 直径 K	螺栓 孔径 L	螺栓		d		f	系列 I	系列 II											
						数量 n	螺纹 规格																
10	使用PN4.0Pa 法兰尺寸																						
15																							
20																							
25																							
32																							
40																							
50																							
65																							
80																							
100																							
125																							
150																							
200												219.1	219	360	310	26	12	M24	274	2	32	221.5	222
250												273	273	425	370	30	12	M27	330	2	35	276.5	276
300												323.9	325	485	430	30	16	M27	389	2	38	327.5	328
350	355.6	377	555	490	33	16	M30	448	2	42	359.5	364											
400	406.4	426	620	550	36	16	M33	503	2	46	411	430											
450	457	480	670	600	36	20	M33	548	2	50	462	484											
500	508	530	730	660	36	20	M33	609	2	56	513.5	534											
600	610	630	845	770	39	20	M36	720	2	68	616.5	634											



上图为 GB/T 9119 PN4.0 PL 平板法兰或近似法兰

查法兰标准就上中国锻件网 www.duanzaochina.com

